

5 Switches, control units, sockets and plugs

5 Sockets and plugs ATX

8 32 A Plugs

The sockets are fitted with an integrated interruption of the poles by a double-safety device. When the plug is pulled, there will be:

- an automatic and simultaneous interruption of every phase in a first explosion-proof chamber
- voltage-free separation of the pins in a second explosion-proof chamber

The cover can be locked in 3 positions:

- with connected plug under tension
- with connected plug voltage free
- without plug, cover closed

For safety reasons, only the mentioned explosion-proof plugs fit in the sockets. The explosion-proof plugs do fit in normal sockets in accordance with CEE17.

II 2 G Ex d e IIC T6/T5

II 2 D Ex tD A21 IP66 T68°C

Zone 0	✗	Zone 20	✗
Zone 1	✓	Zone 21	✓
Zone 2	✓	Zone 22	✓

LCIE02ATEX6068




Specifications

Connection	6mm ²
Cable entries	for cable of 14-18mm
Material	polyamide
Ambiant temperature	-40°C - +50/55°C

Ordering data

Code	No. of poles	Nom. current	Voltage	Weight
S32-230-3	2P+E	32A	220/240 VAC	0,50 kg
S32-230-4	3P+E	32A	220/240 VAC	0,50 kg
S32-400-4	3P+E	32A	380/415 VAC	0,43 kg
S32-400-5	3P+N+E	32A	380/415 VAC	0,50 kg
S32-500-4	3P+E	32A	500 VAC	0,43 kg

Dimensional sketches

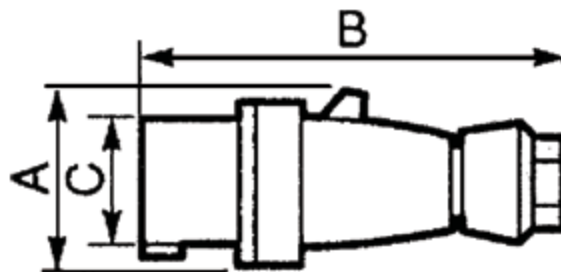

Product code	Dimensions		
	A	B	C
S32-230-3	80	170	67
S32-230-4	80	170	67
S32-400-4	80	170	67
S32-400-5	80	195	74
S32-500-4	80	170	67